

GK75-R01QS



GK75-R01QT



GK75-S01QS



GK75-S01QT




AICO

GK - - - - -


AICO	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES	
GK75	R Round	01	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Dlvd.-1485	27  2700K	50 50°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket	
	S Square		QT Trimless Drywall	W White	W White		97 97+ CRI 15 Watts Lumens Dlvd.-1080	30  3000K	35 35°			NCBX-SR3-R21 IC Box
					G Gold			35  3500K	50 50°			
								40  4000K	35 35°			
									25 25°			
							Dim To Warm	1830  1800-3000K	50 50°	*Remote Placed	*For more details,pls refer to page 3	
							90 90+ CRI 15 Watts Lumens Dlvd.-973	35 35°				
							90 90+ CRI 15 Watts Lumens Dlvd.-1150 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6500K	50 50°			
							TUNABLE WHITE		35 35°			
							90 90+ CRI 15 Watts Lumens Dlvd.-1150	2765  2700-6500K	25 25°	*Dali 2ch Driver Remote Placed		
GK75-R01QS-W-W-B-90-35-50												

Photometry


Beam angle: 50°
Delivered Lumens: 1485 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 99lm/W

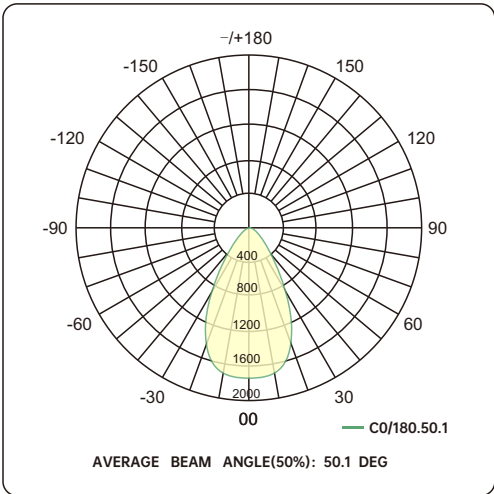

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

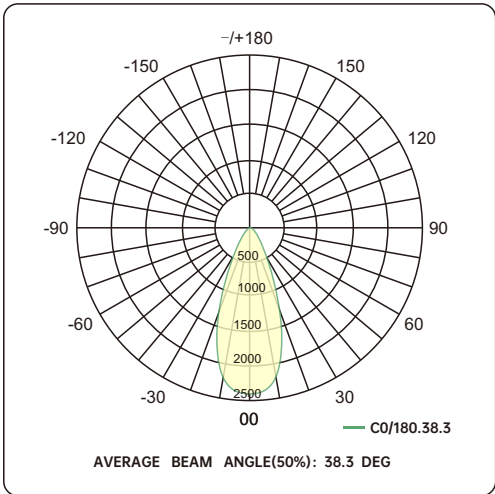


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

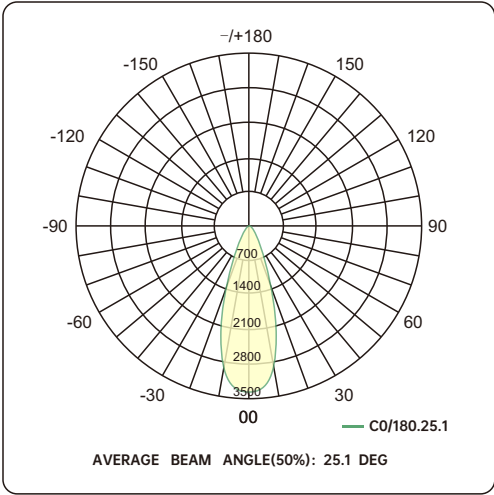

ACCESSORIES

Brackets for New-Construction (4-legs)

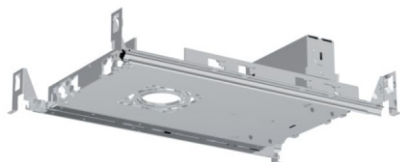


NCP-SR3-R21

For P.GEEK trim&trimless


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

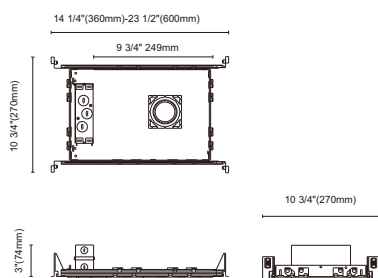

IC-BOX for New-Construction (4-legs)

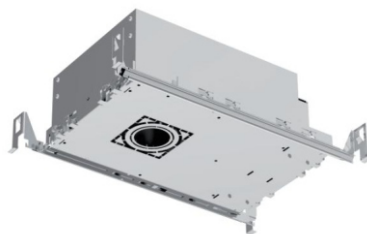


NCBX-SR3-R21

For P.GEEK trim&trimless





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)


Square: □ 3" (□ 77mm)

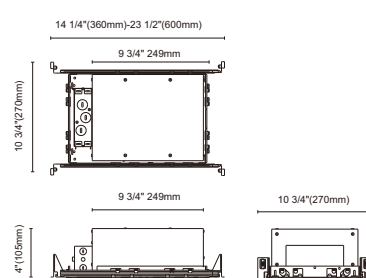

Cut out



Brackets for New-Construction

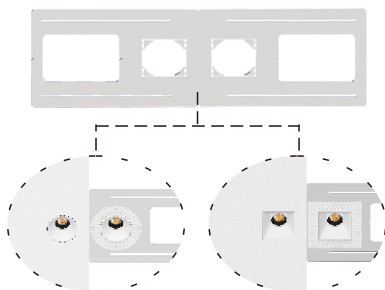


BRKT-2SR75A

For P.GEEK trim & trimless

Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)
Square: □ 77mm*2 (□ 77mm*2)

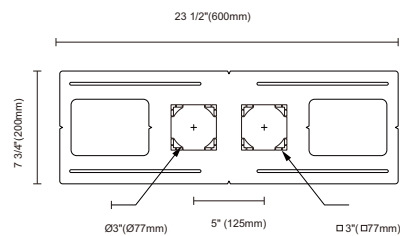




Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests




For more information, please get in touch with XRZLux sales.

GK75-R01QS

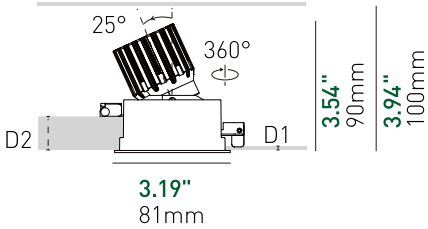

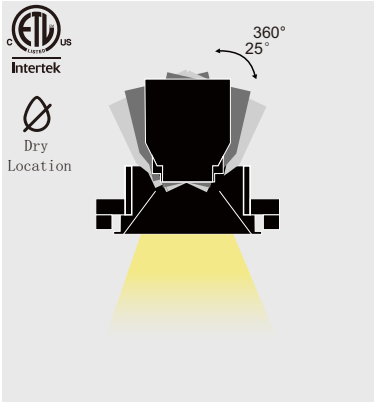


D1:min. **0.06"** (1.5mm)
D2:max.**0.94"** (24mm)

GK75-R01QT

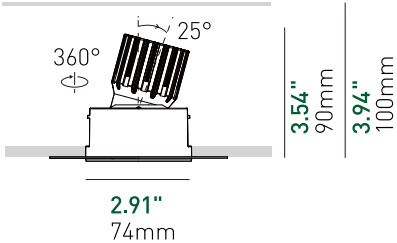

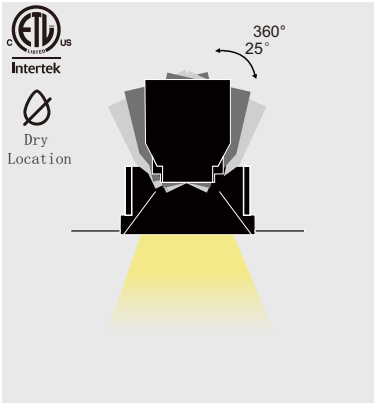


GK75-S01QS

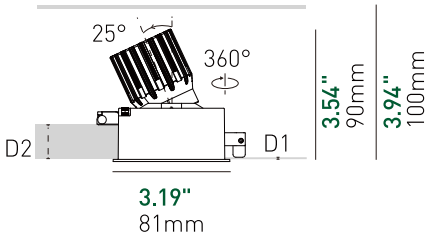

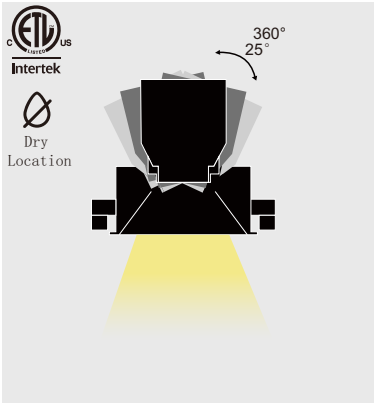


D1:min. **0.06"** (1.5mm)
D2:max.**0.94"** (24mm)

GK75-S01QT

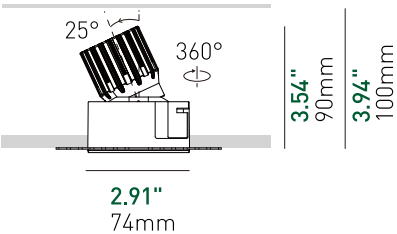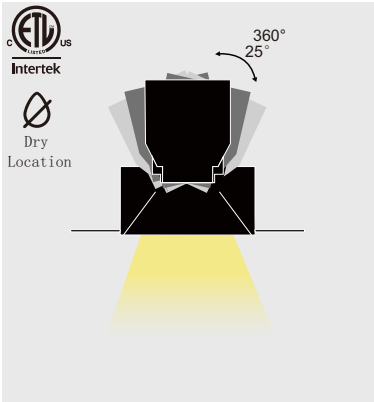

Microflange

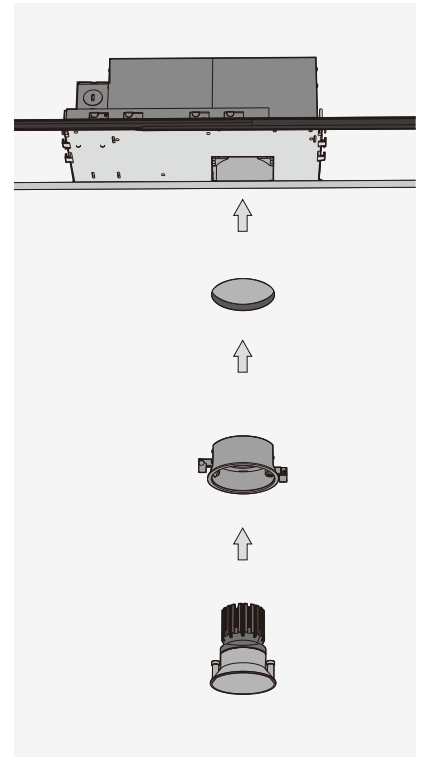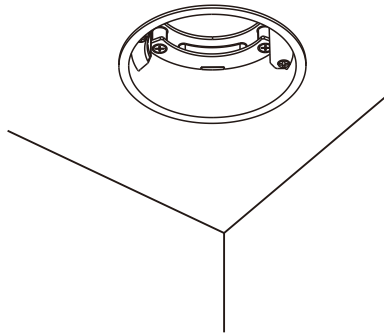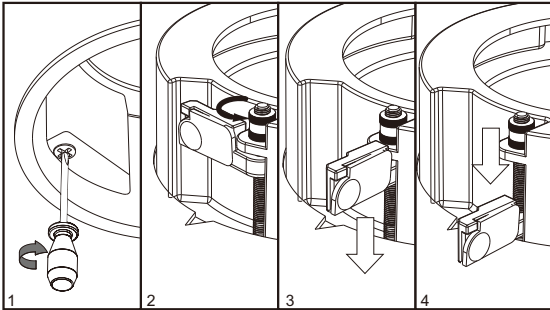

Trimless Drywall

